



# INSTALLATION GUIDE

## PERFORMANCE AIR INTAKE

**FITS HONDA ACCORD 1.5T 2018+ | SKU: MMAI-ACRD-15**

### TABLE OF CONTENTS

**Pg 01** RESOURCES & CONTACT INFORMATION

**Pg 02** IMPORTANT SAFETY INFORMATION

TOOLS NEEDED

INSTALLATION TIME

INSTALLATION DIFFICULTY

INSTALLATION INSTRUCTIONS

**Pg 05** DISPOSAL INSTRUCTIONS

WARRANTY INFORMATION

### RESOURCES & CONTACT



**CALL 1-877-GOMISHI**

CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST



**MISHIMOTO**



**GOMISHIMOTO**



**MISHIMOTO**



**WEBSITE**

[WWW.MISHIMOTO.COM](http://WWW.MISHIMOTO.COM)



**ENGINEERING BLOG**

[WWW.MISHIMOTO.COM/ENGINEERING](http://WWW.MISHIMOTO.COM/ENGINEERING)

### IMPORTANT SAFETY INFORMATION

- Mishimoto recommends you use safety glasses and protective gloves during the install of their products
- Raise vehicle only on jack stands or on a vehicle lift
- Allow vehicle to cool completely prior to attempting installation
- Do not run the engine or drive the vehicle while overheating; serious damage can occur
- Please dispose of any liquids properly
- Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

**INSTALLATION TIME 30 MINUTES**


**INSTALLATION DIFFICULTY**     

### TOOLS NEEDED


POP CLIP TOOL OR SMALL FLAT	1/4" RATCHET AND EXTENSIONS
HEAD SCREWDRIVER	2.5MM ALLEN KEY
5.5MM, 7MM, 8MM, 10MM	PHILIP HEAD SCREWDRIVER
SOCKETS	

### INSTALLATION INSTRUCTIONS

1. Remove the 2x pop clips, then take the air duct off from the stock airbox by lifting it straight up.

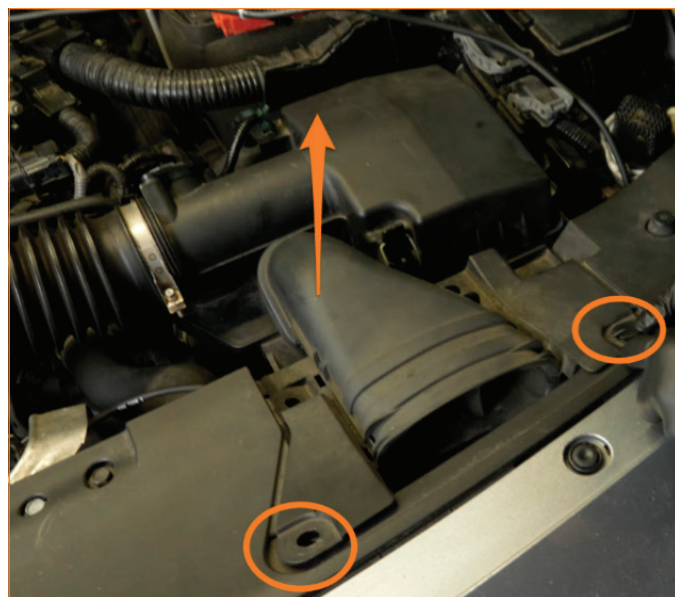


2. Unclip the MAF sensor harness from the airbox.

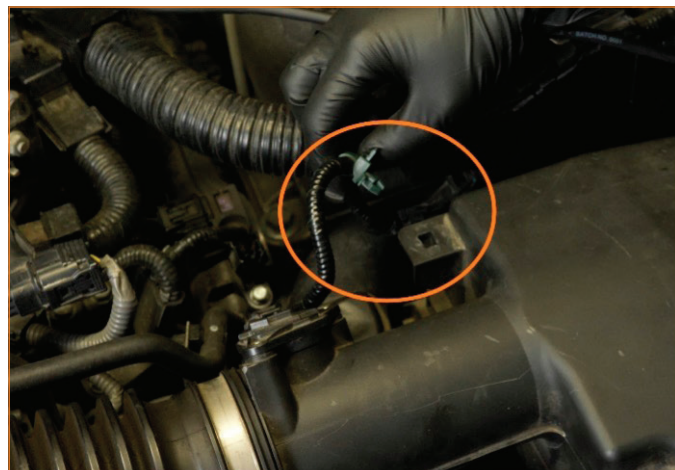


CONTINUED ON FOLLOWING PAGE



**3.** Disconnect MAF sensor.

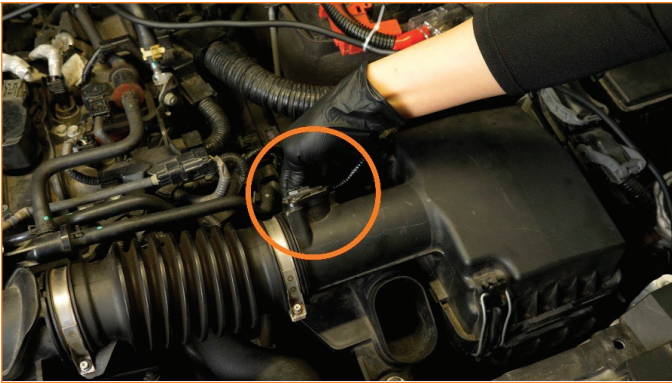

**4.** Remove 2x 10mm bolts securing the stock airbox.

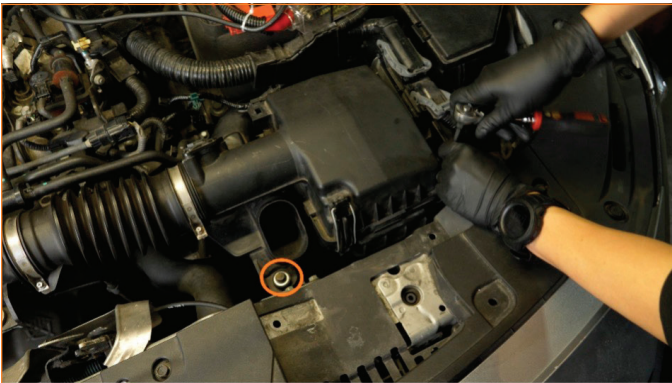

**5.** Remove airbox from the engine bay. Make sure the bottom rubber grommet comes out with the airbox.



**6.** Transfer the MAF sensor from the stock airbox to Mishimoto MAF housing, install with provided hardware. (2x 2.5mm button head bolts)



**7.** Transfer the 3x mounting grommets from the stock airbox to the Mishimoto airbox.



**8.** Assemble the rubber grommet, MAF housing, and air filter as shown.



CONTINUED ON FOLLOWING PAGE

9. Install the MAF housing assembly by inserting the air filter end into the airbox, then push on the rubber grommet until the lip is fully engaged.



10. Install the airbox assembly, push down to engage the bottom grommet with the metal peg in the engine bay.



11. Install the silicone hose and 2x worm gear clamps, then tighten down the airbox with the provided hardware. (2x 10mm bolts and washers)



12. Clip the MAF harness to the Mishimoto airbox, then reconnect the sensor.



**Congratulations! You have finished your installation.**

***\*For Disposal Instructions and Warranty Information continue to the following page.***



## DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

## WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.
- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on [Mishimoto.com](https://www.mishimoto.com) in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.

- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



**WARNING**  
Cancer and  
Reproductive Harm  
[www.P65Warnings.ca.gov](https://www.P65Warnings.ca.gov)

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: [www.p65warnings.ca.gov](https://www.p65warnings.ca.gov)