



INSTALLATION GUIDE

**AIR-TO-WATER INTERCOOLER KIT, FITS 2016+ INFINITI Q50/Q60 3.0T
SKU: MMINT-Q50-16**

TABLE OF CONTENTS

Pg 01 RESOURCES & CONTACT INFORMATION

Pg 02 IMPORTANT SAFETY INFORMATION

TOOLS NEEDED

INSTALLATION INSTRUCTIONS

Pg 07 DISPOSAL INSTRUCTIONS

WARRANTY INFORMATION

RESOURCES & CONTACT



CALL 1-877-GOMISHI

CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST



MISHIMOTO



GOMISHIMOTO



MISHIMOTO



WEBSITE

WWW.MISHIMOTO.COM



ENGINEERING BLOG

WWW.MISHIMOTO.COM/ENGINEERING

IMPORTANT SAFETY INFORMATION

- Mishimoto recommends you use safety glasses and protective gloves during the install of their products
- Raise vehicle only on jack stands or on a vehicle lift
- Allow vehicle to cool completely prior to attempting installation
- Do not run the engine or drive the vehicle while overheating; serious damage can occur
- Please dispose of any liquids properly
- Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

TOOLS NEEDED

7MM RACHET WRENCH	6 1/4"-DRIVE EXTENSION
1/4"-DRIVE RACHET	3 1/4"-DRIVE EXTENSION
3/8"-DRIVE RACHET	3/8"-DRIVE 12MM SOCKET
1/4"-DRIVE 7MM SOCKET	6 3/8"-DRIVE EXTENSION
1/4"-DRIVE 8MM SOCKET	NEEDLE NOSE PLIERS
1/4"-DRIVE 10MM SOCKET	LARGE PICK TOOL
1/4"-DRIVE 12MM SOCKET	

INSTALLATION INSTRUCTIONS

- 01.** Remove engine cover.
- 02.** Drain coolant from system, the drain port is located on the bottom of the heat exchanger.
- 03.** Remove inlet and outlet ancillary hoses.
- 04.** (Optional) place caps on inlet and outlet ports. Both intercoolers with ancillary hoses can be removed as an assembly and drained after removal to reduce the amount of coolant spilled in the engine bay.

- 05.** Remove 2x bolts mounting the hard ancillary lines.




- 06.** Loosen 8x hose clamps from the inlet and outlet air couplers on both intercoolers.



- 07.** Remove the hold-down bolts and unplug boost pressure sensor from both intercoolers.

- 08.** Unclip the oxygen sensor and exhaust gas temperature sensor wires and connectors from lower intercooler mount on driver's side.

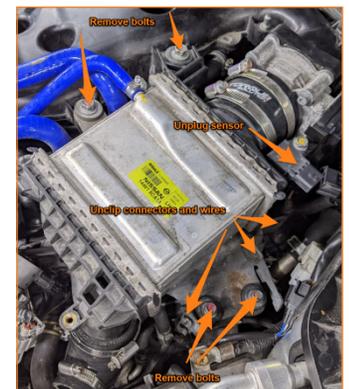


CONTINUED ON FOLLOWING PAGE

- 09. Remove both intercoolers by first pulling upward to remove the inlet coupler, then forward to remove the outlet coupler from the throttle body.
- 10. The entire assembly can then be removed from the vehicle.


Install Mishimoto Intercoolers:


- 11. Install brackets onto intercoolers using supplied M6 bolts.

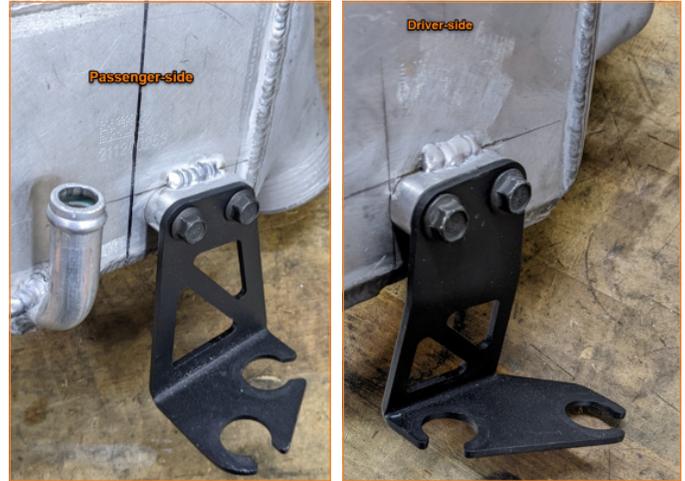

- 12. Transfer 8x rubber grommets from stock intercoolers to Mishimoto intercoolers.



CONTINUED ON FOLLOWING PAGE

13. Transfer boost pressure sensors and mounting bolts from stock intercooler to Mishimoto intercoolers.



14. Install outlet couplers onto intercoolers with clamps loosely in place.



15. Install inlet couplers with clamps onto turbo compressor outlet flange first, leaving clamps loose.



16. Place inlet of intercooler into inlet couplers first.

Note: be sure the wiring harness for the boost pressure sensor is clear on passenger side.

17. Work outlet coupler around throttle body using a pick tool.



CONTINUED ON FOLLOWING PAGE

18. Repeat steps 15 through 18 for the driver side.

19. Install 8x mounting bolts.

20. Tighten all 8x coupler clamps.

21. Plug in boost pressure sensors.

Inlet Ancillary hoses:



22. Install Y-pipe to passenger-side intercooler using supplied hardware.

23. Install ancillary hoses as shown and tighten all clamps.



Outlet Ancillary hoses:



24. Remove stock ancillary metal tube.

25. Install supplied ancillary lines as shown.

26. Remount stock metal tube in stock location with stock bolts.

27. Install outlet ancillary hose to metal tube.



28. Tighten all clamps.

Install complete.

CONTINUED ON FOLLOWING PAGE

Fill and Bleed system according to manufacturer specifications.

If using a Mishimoto catch can:

01. Pre-install Mishimoto catch-can onto the supplied bracket as shown.




02. Remove 2x hold-down bolts from driver-side intercooler bracket. (see top image on right)

03. Install catch can bracket over Intercooler bracket and reinstall bolts holding both brackets down. (see bottom image on right)

04. Reinstall hoses and tighten clamps.

Congratulations! You have finished your installation.

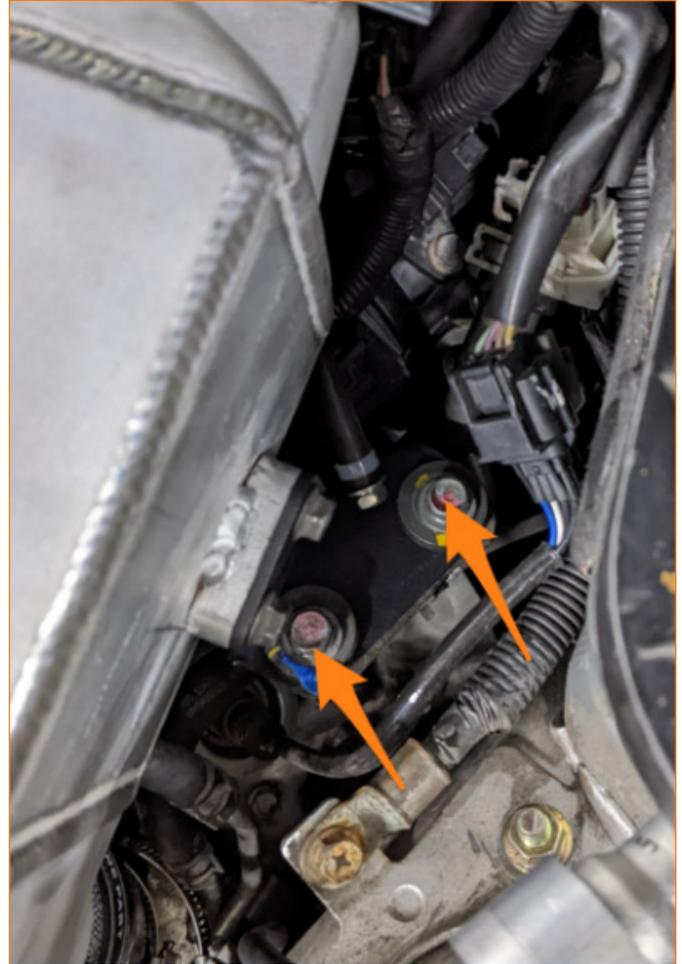

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

WARRANTY INFORMATION

- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.

- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.

- › Any product deemed dead on arrival (DOA) must be claimed within

14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.

- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.
- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on Mishimoto.com in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.



- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: www.p65warnings.ca.gov